

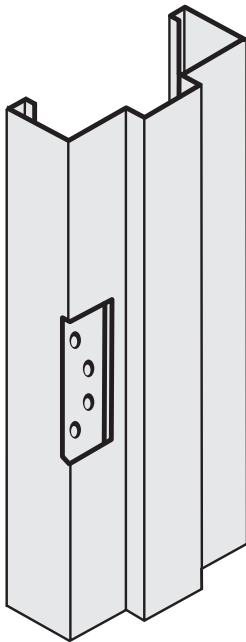
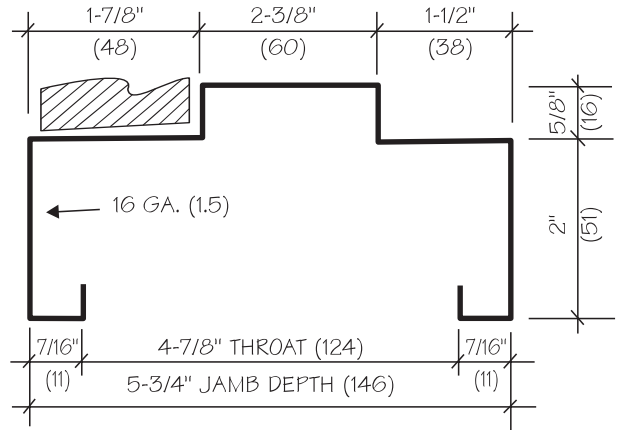



AS 5-3/4 DW STANDARD FRAMES

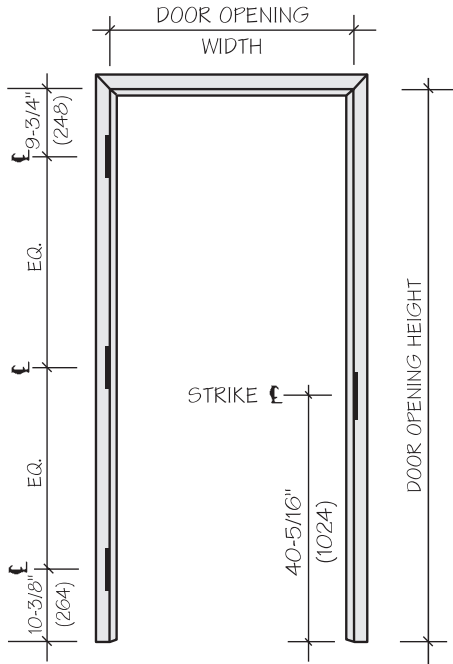

4-1/2" (114) HINGE
PREPARATION—
8 GA. (4.3) REINF.
WITH DUST BOX

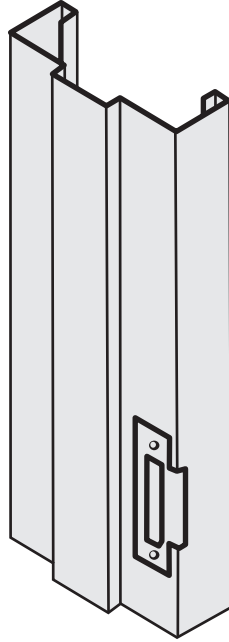

4-7/8" (124) STRIKE
PREPARATION
[ANSI A115.1]
14 GA. (2.0) REINF.
WITH DUST BOX.

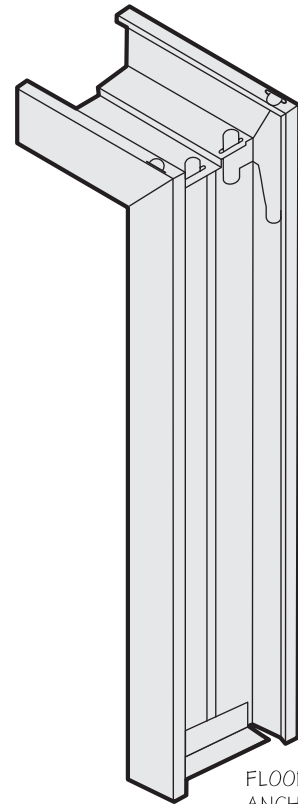

5-TAB
K.D. CORNER

FLOOR FLANGE
ANCHOR

PRINTED IN CANADA

PROJECT:

DATE:

SH: OF



SWING KEY

